



YA Vibrating Screen

YA Series Vibrating Screen is of multiple layers and vibrating circularly. It is of long screen line, correct to screen in all kinds of specification products. Our Vibrating Screen adopts the barrel type of eccentric shaft vibration exciter and eccentric block to adjust the swing. It is also of reliable structure, strong exciting force, high screening efficiency, low vibrating noise, long durability, convenient maintenance, safe operation, etc. our Vibrating Screen is widely used for screening in mines, building material, transportation, energy sources, chemical industry, etc.

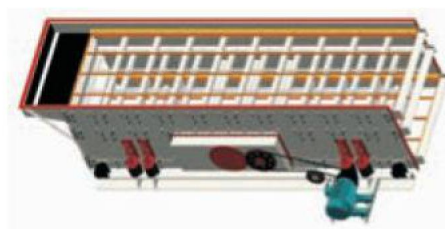

YK Vibrating Screen

YK Vibrating screen the body rivet technical; Easy adjustment, high screening efficiency; Sealed structure body prevent the dusty pollution

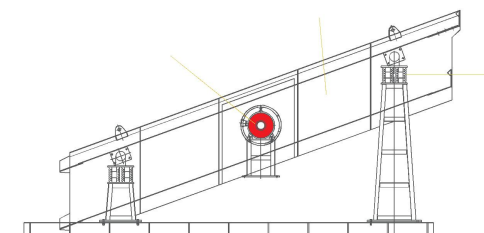

Main Specification

Model	Layer of Screen	Size of Sieve Pore (mm)	Max. Feeding Size (mm)	Capacity (m ³ /h)	Double Amplitude (mm)	Model of Motor	Motor Power (kw)	Screen Specification (mm)
2YA1237	2	3~50	300	10~80	6-8	Y160M-4	11	1200×3700
3YA1237	3	3~50	300	10~80	8	Y160M-4	11	1200×3700
4YA1237	4	3~50	300	10~80	8	Y160M-4	11	1200×3700
2YA1548	2	3~100	300	22~160	8	Y160L-4	15	1500×4800
3YA1548	3	3~100	300	22~160	8	Y160L-4	15	1500×4800
4YA1548	4	3~100	300	22~160	8	Y160L-4	15	1500×4800
2YA1848	2	3~100	300	32~276	8	Y180M-4	18.5	1800×4800
3YA1848	3	3~100	300	32~276	8	Y180M-4	18.5	1800×4800
4YA1848	4	3~100	300	32~276	8	Y180M-4	18.5	1800×4800
2YA1860	2	3~100	300	65~586	8	Y180M-4	22	1800×6000
3YA1860	3	3~100	300	65~586	8	Y180M-4	22	1800×6000
4YA1860	4	3~100	300	65~586	8	Y180M-4	22	1800×6000
2YA2160	2	3~100	300	81~720	8	Y200L-4	30	2100×6000
3YA2160	3	3~100	300	81~720	8	Y200L-4	30	2100×6000
4YA2160	4	3~100	300	81~720	8	Y200L-4	37	2100×6000
2YA2460	2	3~150	300	90~810	8	Y225S-4	37	2400×6000
3YA2460	3	3~150	300	90~810	8	Y225S-4	37	2400×6000
4YA2460	4	3~150	300	90~810	8	Y225S-4	37	2400×6000
2YK2870	2	3~200	300	150~1000	8	Y225S-4	37	2800×6500
3YK2870	3	3~200	300	150~1000	8	Y225S-4	37	2800×6500
4YK2870	4	3~200	300	150~1000	8	Y225M-4	45	2800×6500
2YK3073	2	3~200	300	180~1300	8	Y200L-4	30×2	3000×7300
3YK3073	3	3~200	300	180~1300	8	Y200L-4	30×2	3000×7300
4YK3073	4	3~200	300	180~1300	8	Y200L-4	30×2	3000×7300
3EL1860	3	3~100	400	180~580	14-19	Y200L-4	30×2	1800×6000

型号 Model	筛面层数 Screen Decker	筛面规格 Screen Face Size (mm)	最大进料粒度 Max. Feed Size (mm)	处理量 Capacity (t/h)	振动频率 Vibrating Frequency (HZ)	电机功率 Motor Power (KW)	重量 Weight (t)	外型尺寸 Dimension (L×W×H,mm)
3YK-1245	3	1200×4500	200	15-80	16.2	11	4.807	5600×1800×1850
2YK-1548	2	1500×4800	200	30-180	13-16	15	5.800	1906×2100×1600
3YK-1548	3	1500×4800	200	30-200	13-16	15	6.866	5906×2100×1600
4YK-1548	4	1500×4800	200	30-250	13-16	18.5	7.360	5906×2100×2150
2YK-1854	2	1800×5400	250	50-300	16.2	18.5	6.769	6509×2536×1810
3YK-1854	3	1800×5400	250	50-300	16.2	22	8.285	6509×2536×1910
4YK-1854	4	1800×5400	250	50-300	16.2	30	9.796	6509×2536×2250
2YK-2160	2	2100×6000	250	100-400	16.2	30	9.680	7150×2670×2120
3YK-2160	3	2100×6000	250	100-400	16.2	30	10.206	7150×2670×2270
4YK-2160	4	2100×6000	250	100-400	16.2	30	11.800	7150×2670×2650
2YK-2460	2	2400×6000	300	150-600	16.2	30	10.200	7150×2900×1950
3YK-2460	3	2400×6000	300	150-600	16.2	30	12.350	7150×2900×2350
DF-1230	1	1200×3000	200	20-200	16.2	5.5	15.400	3500×1800×1100
DF-1548	1	1500×4800	250	50-450	16.2	15	3.750	5330×2000×1300
DF-1854	1	1800×5400	300	70-600	16.2	15	4.590	5630×2200×1320
DF-2160	1	2100×6000	300	120-750	16.2	15	5.423	6550×2600×1420